
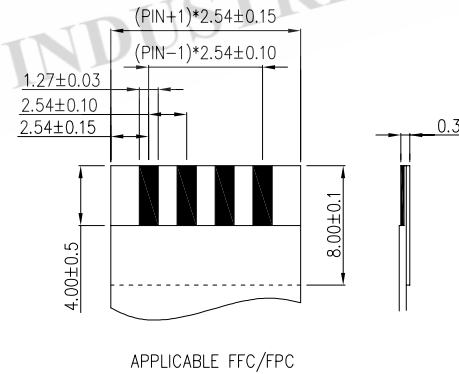
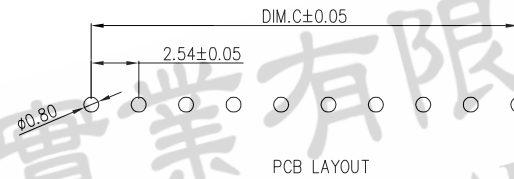


- SPEC :
- Housing: High-Temp Plastic, UL94-V
Color: Black
 - Locker: High-Temp Plastic, UL94-V
Color: Black
 - Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
 - Solder Tab: BRASS
 - Temperature Rating: -55°C ~ +85°C
 - Dielectric Withstanding Voltage: 500V AC/Min

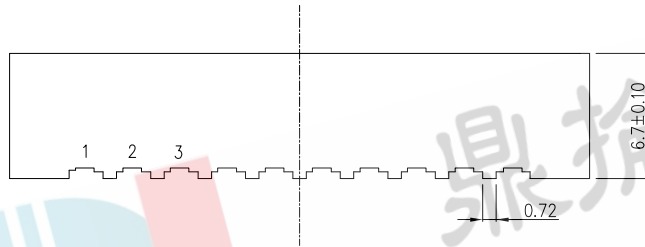

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C
	2	10.74	8.43	2.54
	3	13.28	10.97	5.08
	4	15.82	13.51	7.62
	5	18.36	16.05	10.16
	6	20.9	18.59	12.7
	7	23.44	21.13	15.24
	8	25.98	23.67	17.78
	9	28.52	26.21	20.32
	10	31.06	28.75	22.86
	11	33.6	31.29	25.4
	12	36.14	33.83	27.94
	13	38.68	36.37	30.48
	14	41.22	38.91	33.02
	15	43.76	41.45	35.56
	16	46.3	43.99	38.1
	17	48.84	46.53	40.64
	18	51.38	49.07	43.18

ORDERING INFORMATION:

FPCQ - 25455 FWDE - xx - x - x

- PLATING: T=TIN
- PACKING T=TUBE
- NO. of contacts
- Series name
- PITCH=2.54mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE FPC 2.54PH 4.55H 無蓋平面彎插雙接

DRAWN: **michael lin** 2010/10/22
TOLERANCE .X±0.30
SCALE None
CHECKED: **Eddie Liu** 2010/10/22
UNIT .XXX±0.10 mm
APPROVED: **Eddie Liu** 2010/10/22
PROJECTION
REV. A

P/N NO. FPCQ-25455FWDE-xx-x
DWG. NO.
CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
△			
△			
△			