

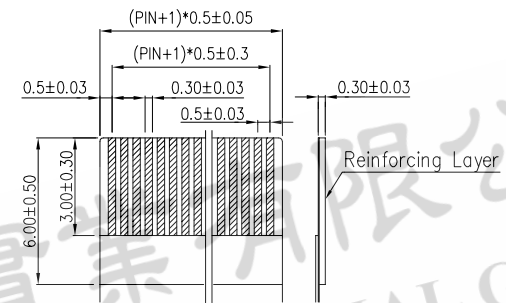


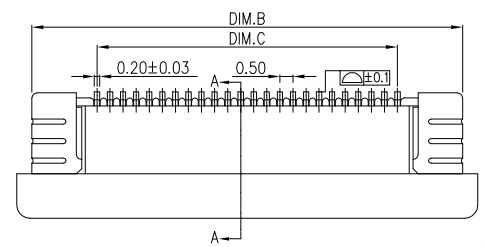



- SPEC :
- Housing: High-Temp Plastic, UL94-V
Color: Black
 - Locker: High-Temp Plastic, UL94-V
Color: Black
 - Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
 - Solder Tab: BRASS
 - Temperature Rating: -25°C ~ +85°C
 - Dielectric Withstanding Voltage: 500V AC/Min

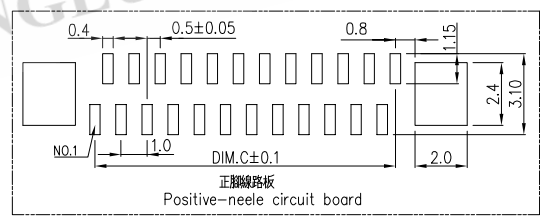


RECOMMENDED FFC/FPC DIM.

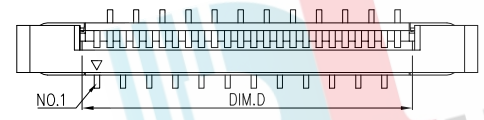

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
35	23.10	22.00	17.00	18.10	
36	23.60	22.50	17.50	18.60	
37	24.10	23.00	18.00	19.10	
38	24.60	23.50	18.50	19.60	
39	25.10	24.00	19.00	20.10	
40	25.60	24.50	19.50	20.60	
41	26.10	25.00	20.00	21.10	
42	26.60	25.50	20.50	21.60	
43	27.10	26.00	21.00	22.10	
44	27.60	26.50	21.50	22.60	
45	28.10	27.00	22.00	23.10	
46	28.60	27.50	22.50	23.60	
47	29.10	28.00	23.00	24.10	4.9
48	29.60	28.50	23.50	24.60	
49	30.10	29.00	24.00	25.10	
50	30.60	29.50	24.50	25.60	
51	31.10	30.00	25.00	26.10	
52	31.60	30.50	25.50	26.60	
53	32.10	31.00	26.00	27.10	
54	32.60	31.50	26.50	27.60	
55	33.10	32.00	27.00	28.10	
56	33.60	32.50	27.50	28.60	
57	34.10	33.00	28.00	29.10	
58	34.60	33.50	28.50	29.60	
59	35.10	34.00	29.00	30.10	
60	35.60	34.50	29.50	30.60	

ORDERING INFORMATION:

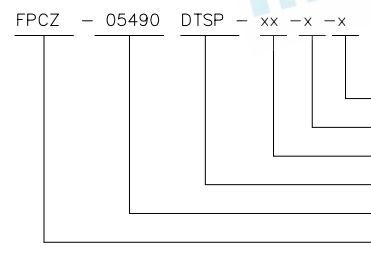

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=0.5mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 0.5PH 4.9H 抽屜立式單接正腳

DRAWN:	<i>michael lin</i> 2017/08/22	TOLERANCE	SCALE	P/N NO.
CHECKED:	<i>Eddie Liu</i> 2017/08/22	.X±0.30	None	FPCZ-05490DTSP-xx-xx
APPROVED:	<i>Eddie Liu</i> 2017/08/23	.XX±0.20	UNIT	DWG. NO.
		.XXX±0.10	mm	
		PROJECTION	REV.	CUSTOMER P/N NO.
			A	

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			
8			
9			