






- SPEC :
- Housing:High-Temp Plastic,UL94-V
Color:Black
 - Locker:High-Temp Plastic,UL94-V
Color:Black
 - Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
 - Solder Tab:BRASS
 - Temperature Rating:-25°C~+85°C
 - Dielectric Withstanding Voltage:500V AC/Min

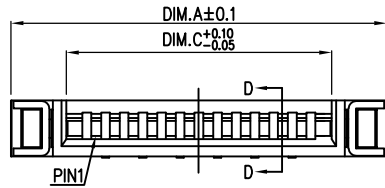

SECTION D-D

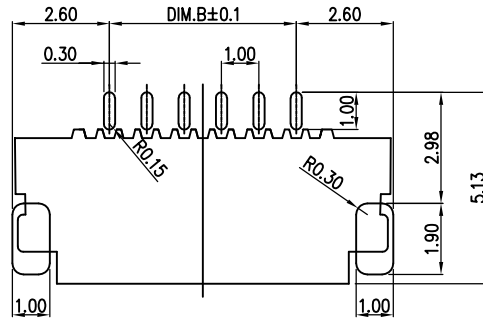

Recommended P.C.B Layout

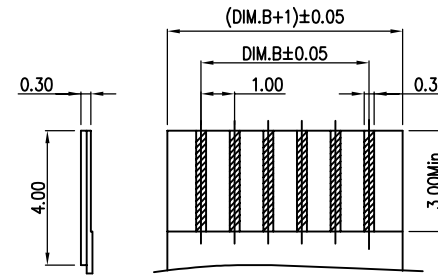

Applicable FPC

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C
4	8.03	3.00	5.07
5	9.03	4.00	6.07
6	10.03	5.00	7.07
7	11.03	6.00	8.07
8	12.03	7.00	9.07
9	13.03	8.00	10.07
10	14.03	9.00	11.07
11	15.03	10.00	12.07
12	16.03	11.00	13.07
13	17.03	12.00	14.07
14	18.03	13.00	15.07
15	19.03	14.00	16.07
16	20.03	15.00	17.07
17	21.03	16.00	18.07
18	22.03	17.00	19.07
19	23.03	18.00	20.07
20	24.03	19.00	21.07
21	25.03	20.00	22.07
22	26.03	21.00	23.07
23	27.03	22.00	24.07
24	28.03	23.00	25.07
25	29.03	24.00	26.07
26	30.03	25.00	27.07
27	31.03	26.00	28.07
28	32.03	27.00	29.07
29	33.03	28.00	30.07
30	34.03	29.00	31.07

ORDERING INFORMATION:

FPCZ - 10150 SHDE - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.0mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE FPC 1.0PH 1.5H 無蓋有焊臥貼雙接

DRAWN:	michael lin 2017/07/22	TOLERANCE	SCALE	P/N NO.
CHECKED:	Eddie Liu 2017/07/22	.X±0.30	None	FPCZ-10150SHDE-xx-xx
APPROVED:	Eddie Liu 2017/07/23	.XX±0.20	UNIT	DWG. NO.
		.XXX±0.10	mm	
		PROJECTION	REV.	CUSTOMER P/N NO.
		⊕	A	

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			