

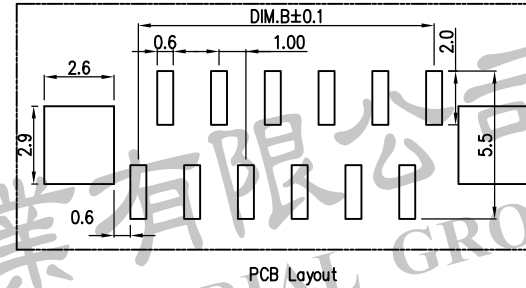


- SPEC :
- Housing:High-Temp Plastic,UL94-V
Color:Black
 - Locker:High-Temp Plastic,UL94-V
Color:Black
 - Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
 - Solder Tab:BRASS
 - Temperature Rating:-25°C~+85°C
 - Dielectric Withstanding Voltage:500V AC/Min

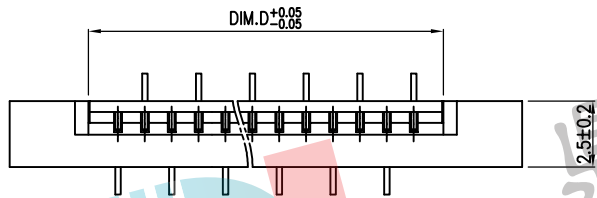

● : 表示現有可提供PIN數

| PIN | DIM.A | DIM.B | DIM.C | DIM.D |
|-----|-------|-------|-------|-------|
| 4 | 9.2 | 3.0 | 11.0 | 5.1 |
| 5 | 10.2 | 4.0 | 12.0 | 6.1 |
| 6 | 11.2 | 5.0 | 13.0 | 7.1 |
| 7 | 12.2 | 6.0 | 14.0 | 8.1 |
| 8 | 13.2 | 7.0 | 15.0 | 9.1 |
| 9 | 14.2 | 8.0 | 16.0 | 10.1 |
| 10 | 15.2 | 9.0 | 17.0 | 11.1 |
| 11 | 16.2 | 10.0 | 18.0 | 12.1 |
| 12 | 17.2 | 11.0 | 19.0 | 13.1 |
| 13 | 18.2 | 12.0 | 20.0 | 14.1 |
| 14 | 19.2 | 13.0 | 21.0 | 15.1 |
| 15 | 20.2 | 14.0 | 22.0 | 16.1 |
| 16 | 21.2 | 15.0 | 23.0 | 17.1 |
| 17 | 22.2 | 16.0 | 24.0 | 18.1 |
| 18 | 23.2 | 17.0 | 25.0 | 19.1 |
| 19 | 24.2 | 18.0 | 26.0 | 20.1 |
| 20 | 25.2 | 19.0 | 27.0 | 21.1 |
| 21 | 26.2 | 20.0 | 28.0 | 22.1 |
| 22 | 27.2 | 21.0 | 29.0 | 23.1 |
| 23 | 28.2 | 22.0 | 30.0 | 24.1 |
| 24 | 29.2 | 23.0 | 31.0 | 25.1 |
| 25 | 30.2 | 24.0 | 32.0 | 26.1 |
| 26 | 31.2 | 25.0 | 33.0 | 27.1 |
| 27 | 32.2 | 26.0 | 34.0 | 28.1 |
| 28 | 33.2 | 27.0 | 35.0 | 29.1 |
| 29 | 34.2 | 28.0 | 36.0 | 30.1 |
| 30 | 35.2 | 29.0 | 37.0 | 31.1 |
| 31 | 36.2 | 30.0 | 38.0 | 32.1 |
| 32 | 37.2 | 31.0 | 39.0 | 33.1 |
| 33 | 38.2 | 32.0 | 40.0 | 34.1 |
| 34 | 39.2 | 33.0 | 41.0 | 35.1 |
| 35 | 40.2 | 34.0 | 42.0 | 36.1 |
| 36 | 41.2 | 35.0 | 43.0 | 37.1 |
| 37 | 42.2 | 36.0 | 44.0 | 38.1 |
| 38 | 43.2 | 37.0 | 45.0 | 39.1 |
| 39 | 44.2 | 38.0 | 46.0 | 40.1 |
| 40 | 45.2 | 39.0 | 47.0 | 41.1 |

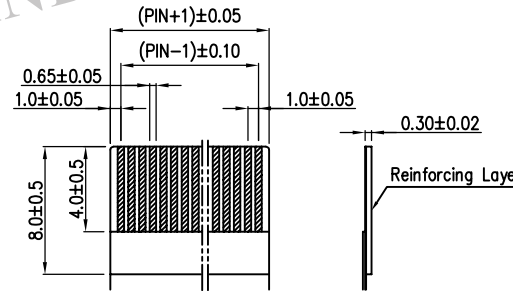

RECOMMENDED FFC/FPC DIM.

ORDERING INFORMATION:

FPCZ - 10560 DTSP - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.0mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 1.0PH 5.6H 抽屜式單接正腳

| | | | | |
|-----------|---------------------------|------------|-------|---------------------------------|
| DRAWN: | michael lin 2017/08/22 | TOLERANCE | SCALE | P/N NO. FPCZ-10560DTSP-xx-xx |
| | | .X±0.30 | None | |
| CHECKED: | Eddie Liu 2017/08/22 | .XX±0.20 | UNIT | DWG. NO. |
| | | .XXX±0.10 | mm | |
| APPROVED: | Eddie Liu 2017/08/23 | PROJECTION | REV. | CUSTOMER P/N NO. |
| | | ⊕ | A | |

| REV. | REASONS | DATE | DRAWN |
|------|---------|------|-------|
| △ | | | |
| △ | | | |
| △ | | | |